




FIG. 1 is a perspective view of a system 100 for processing a sample 105. The system 100 includes a sample holder 110, a sample processing unit 120, and a control unit 130. The sample holder 110 is configured to hold the sample 105 in a position for processing. The sample processing unit 120 is configured to process the sample 105. The control unit 130 is configured to control the operation of the sample processing unit 120. The system 100 is configured to process the sample 105 in a controlled environment.


100


100

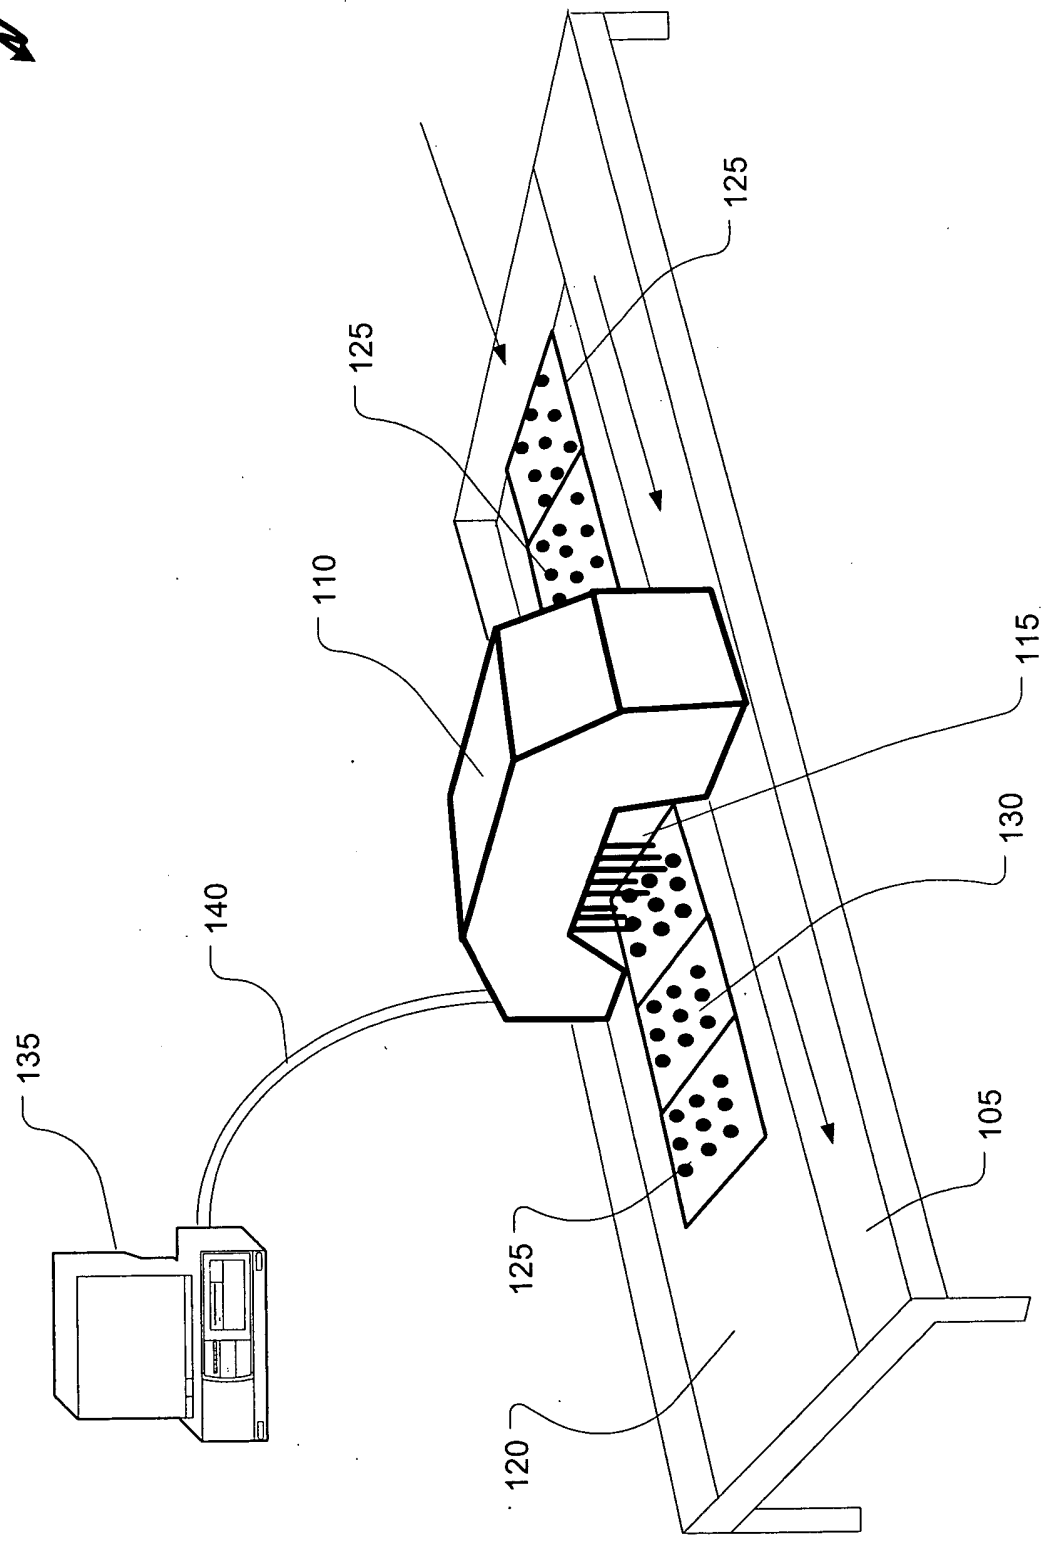

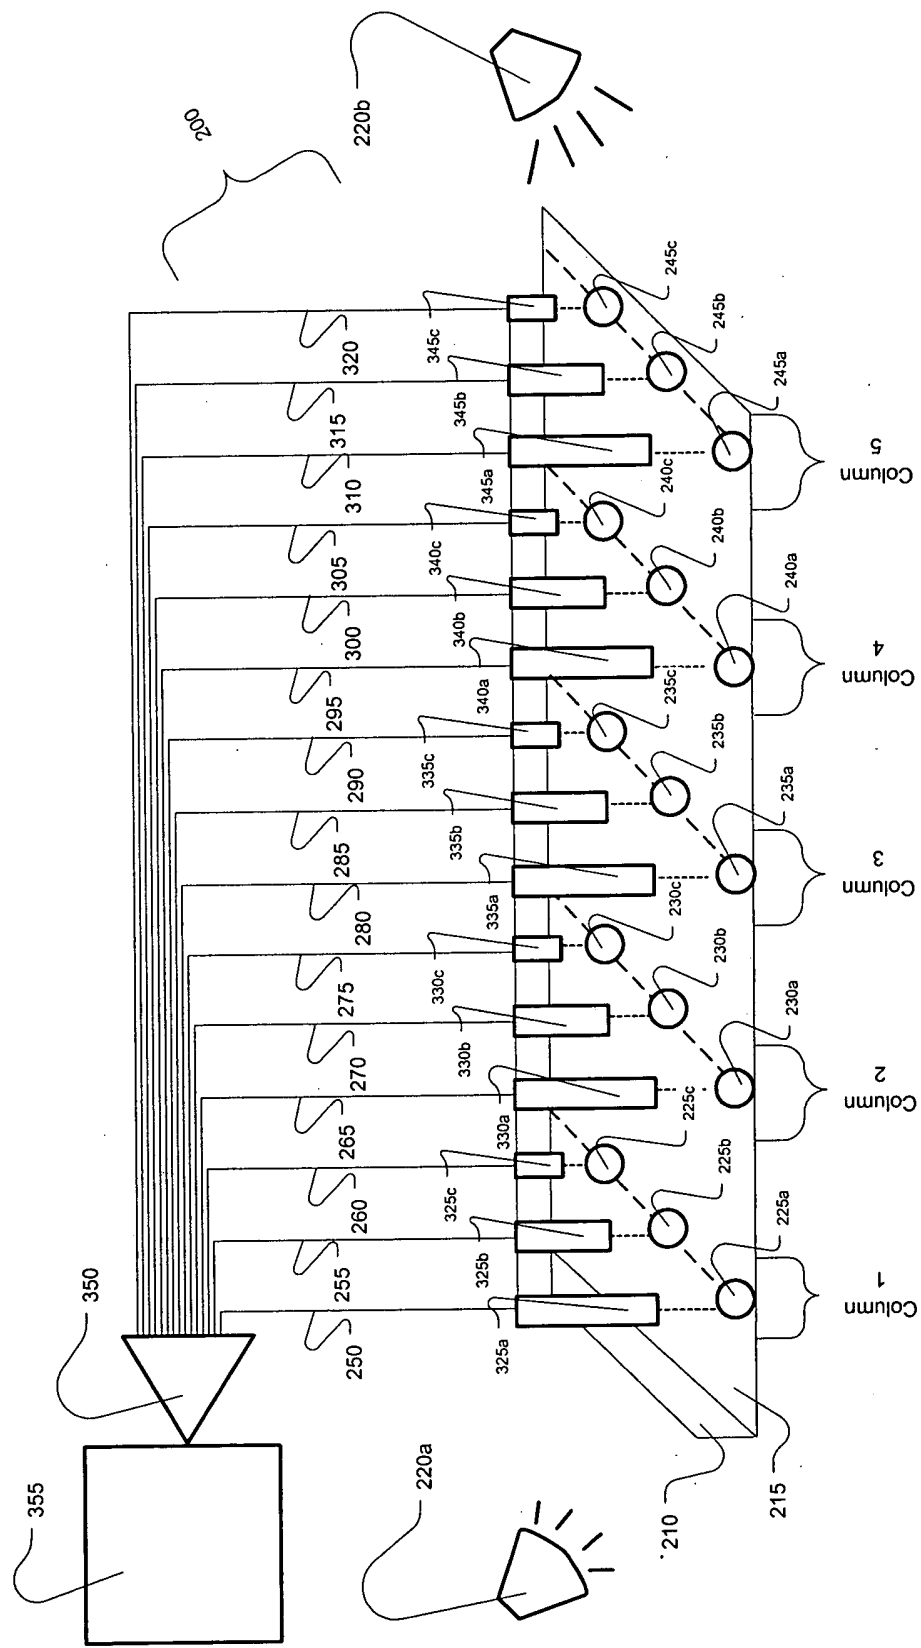


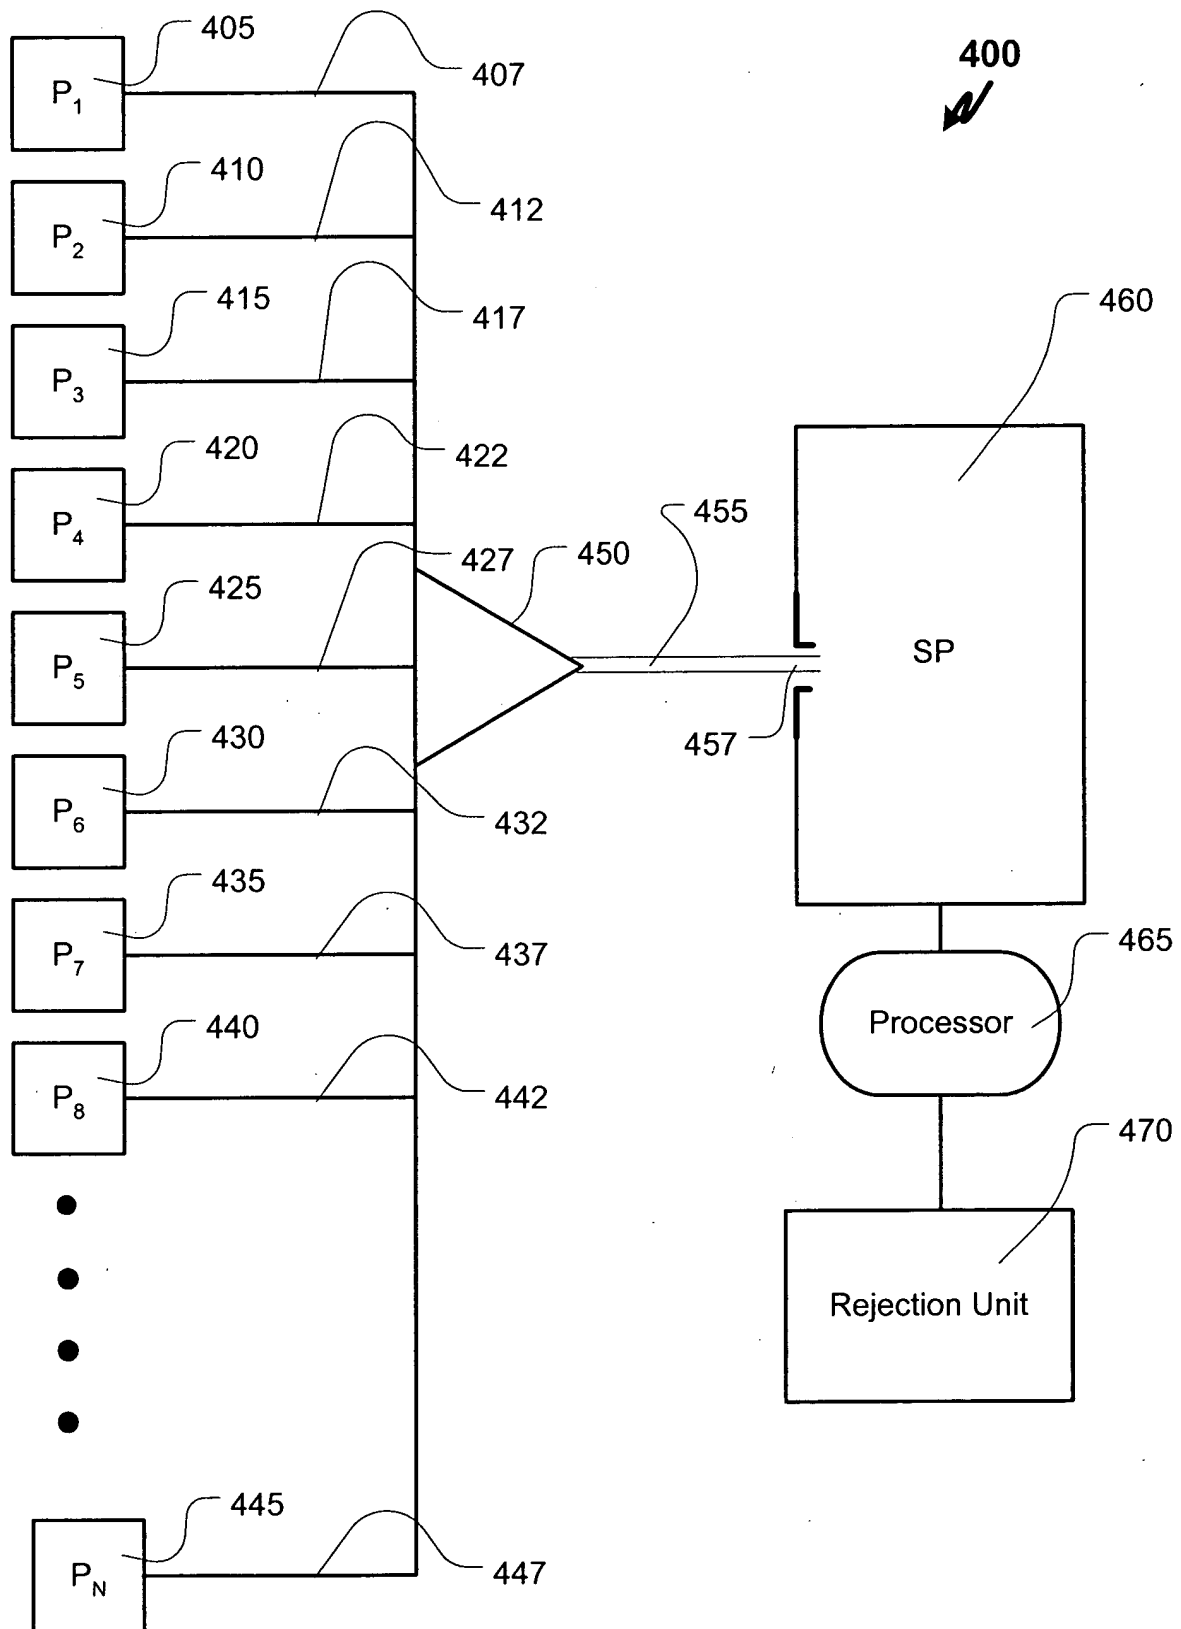


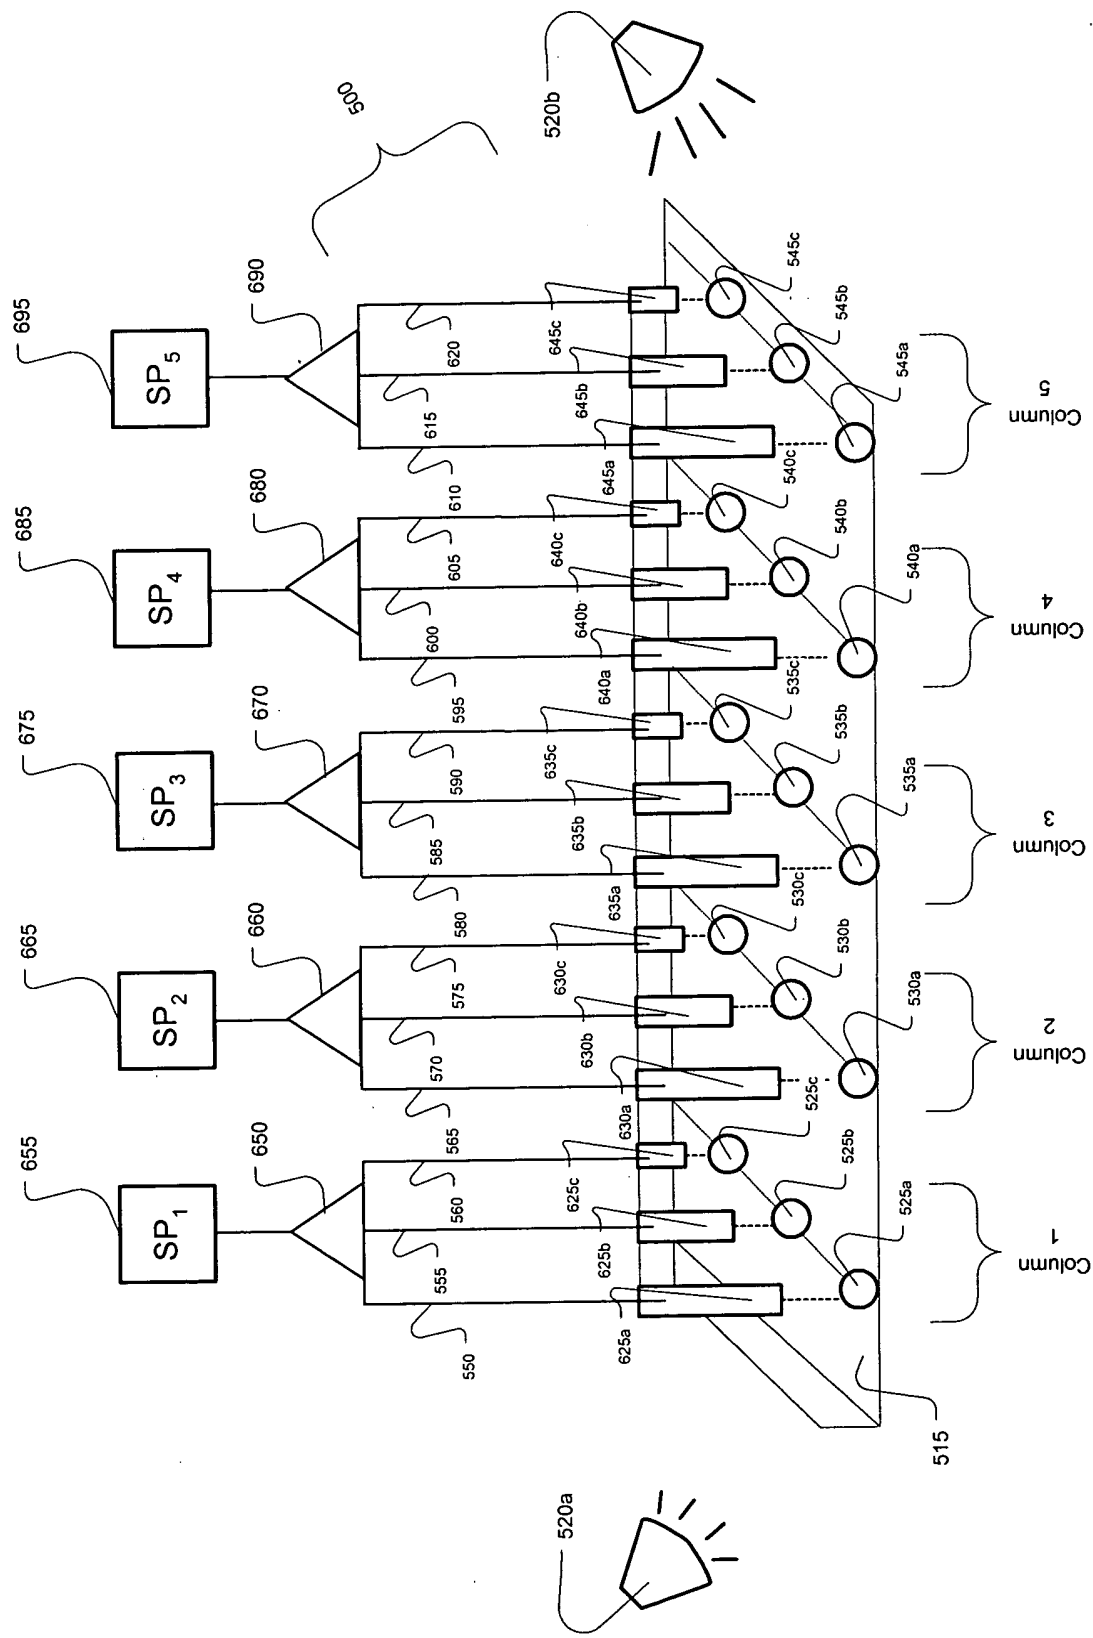


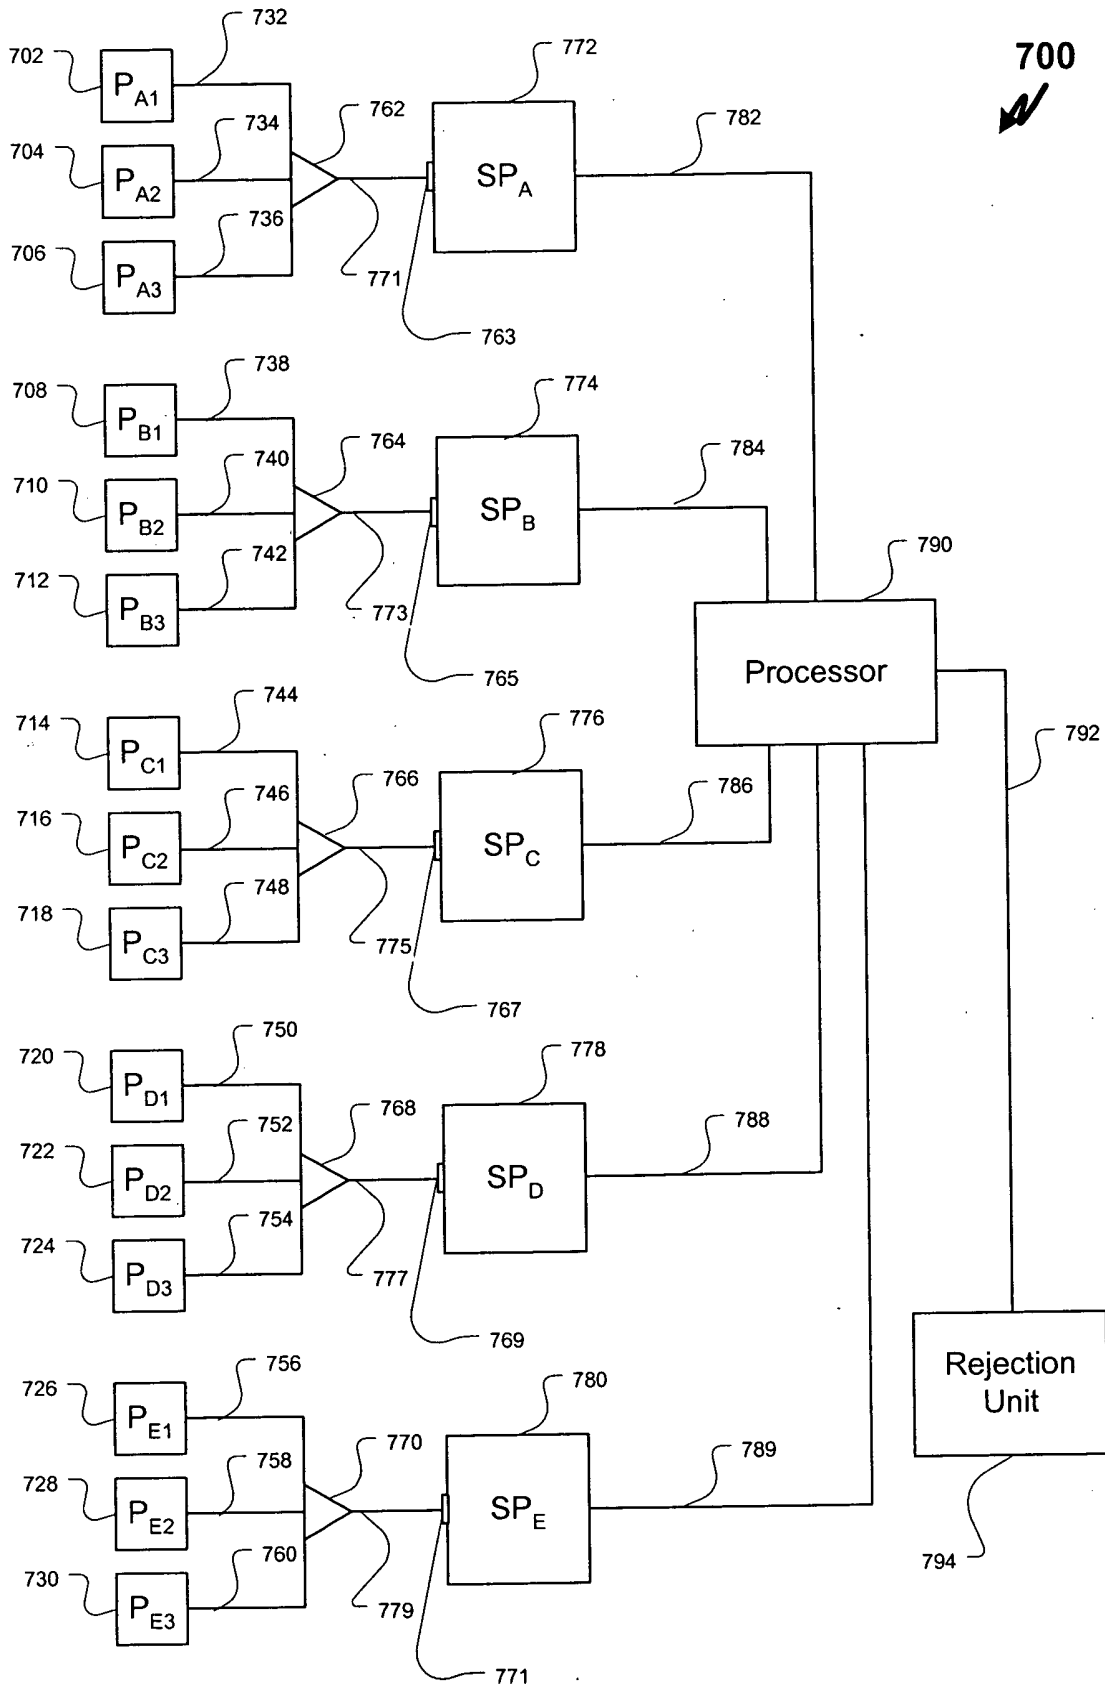


ASDI-003/00US

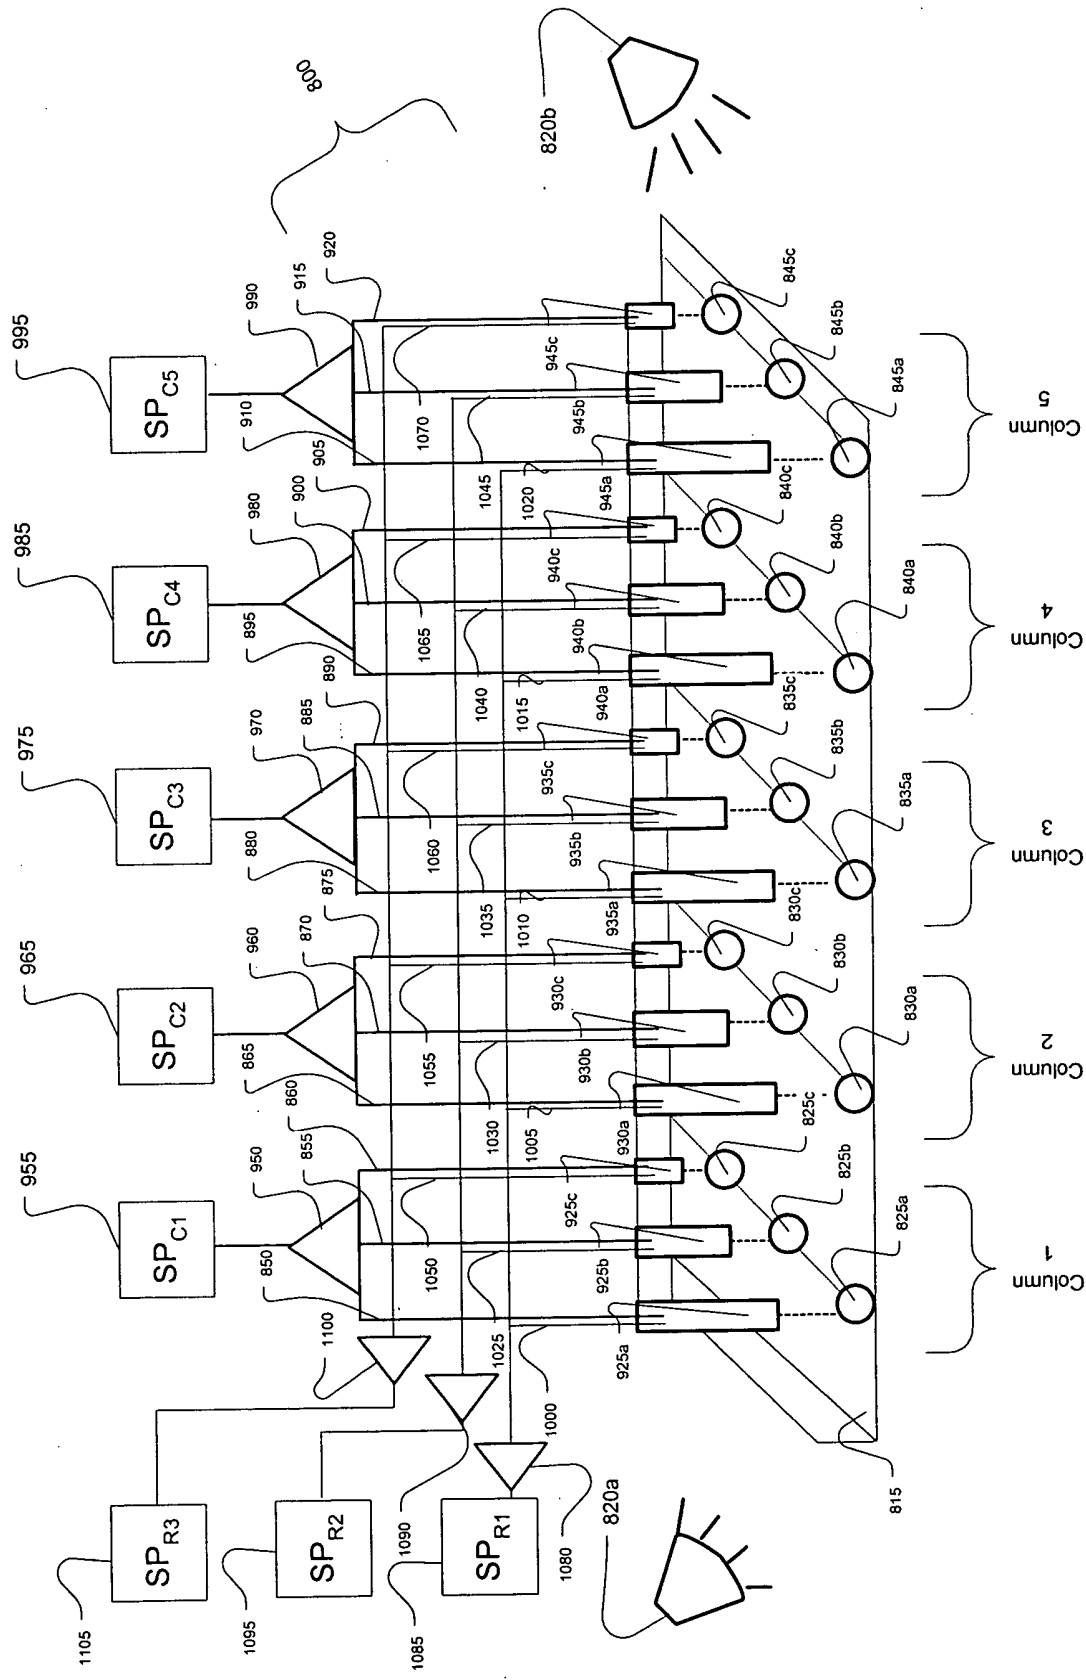

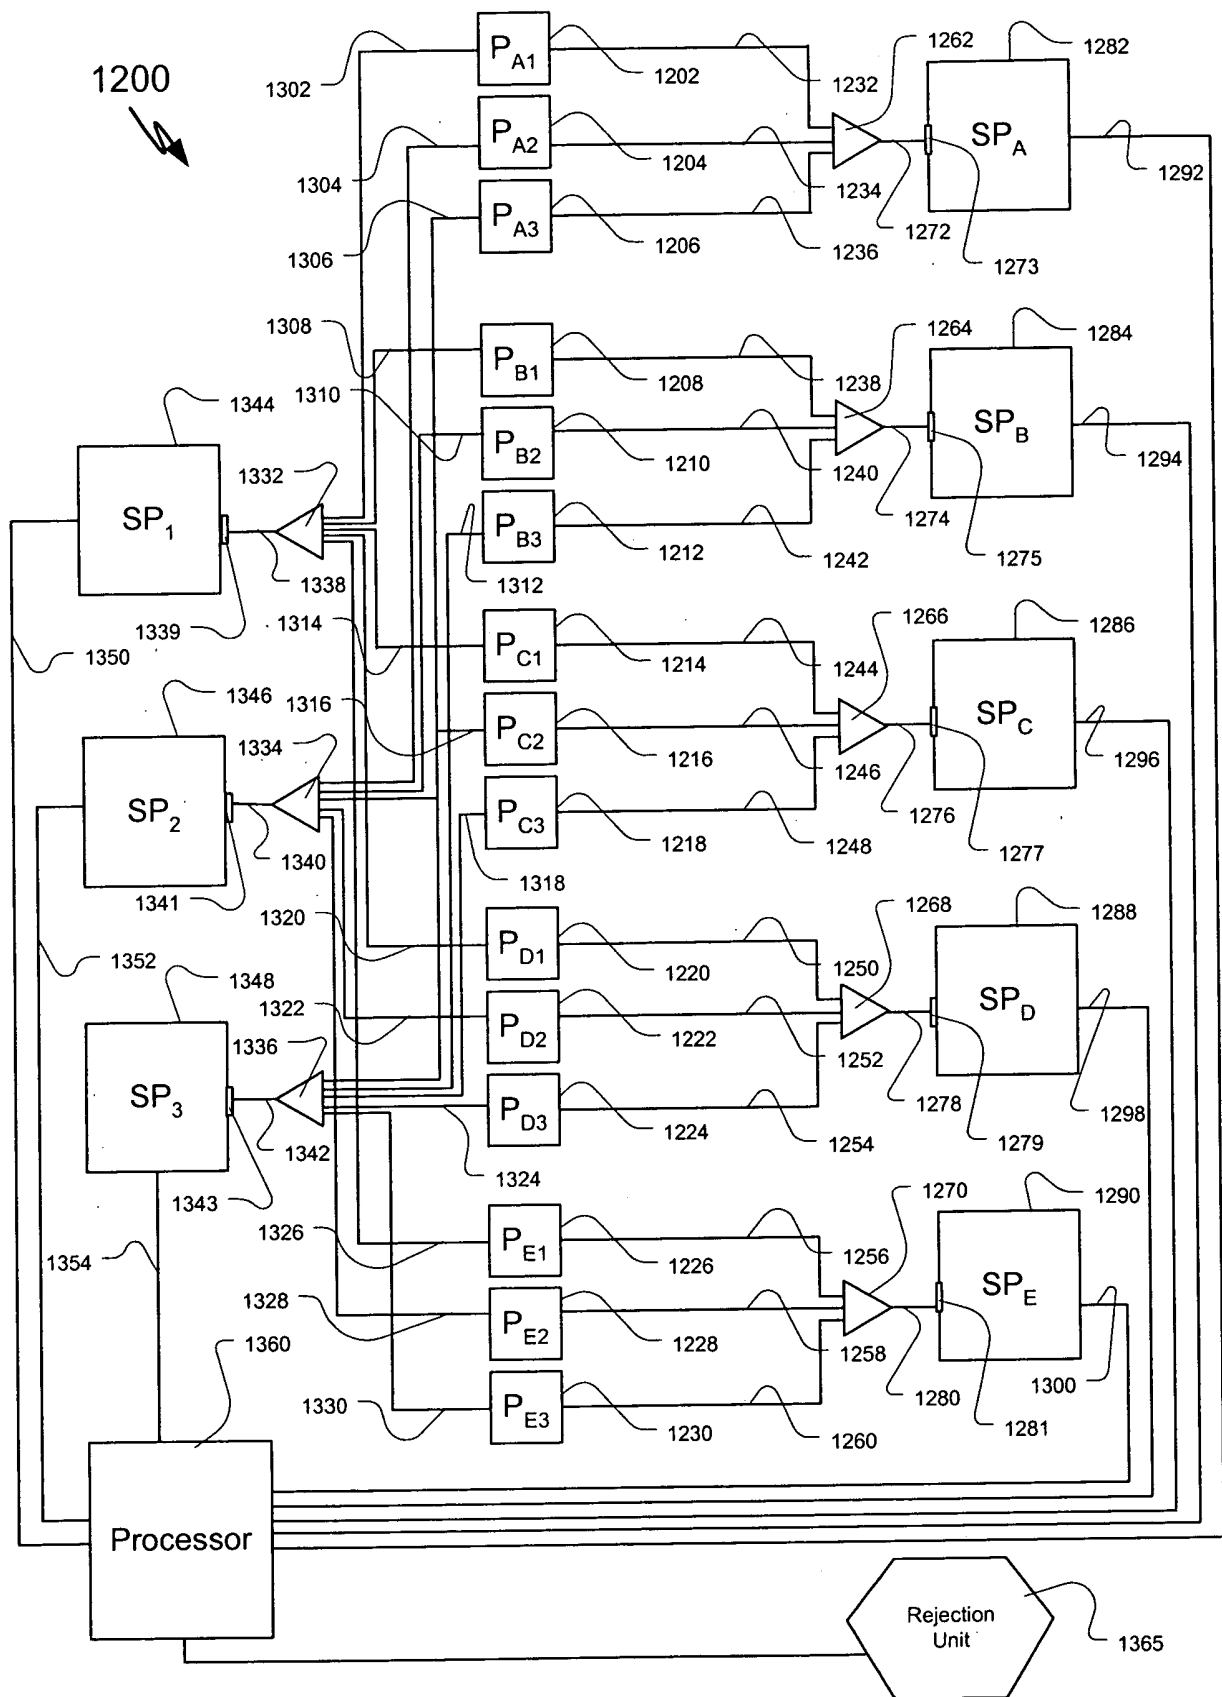

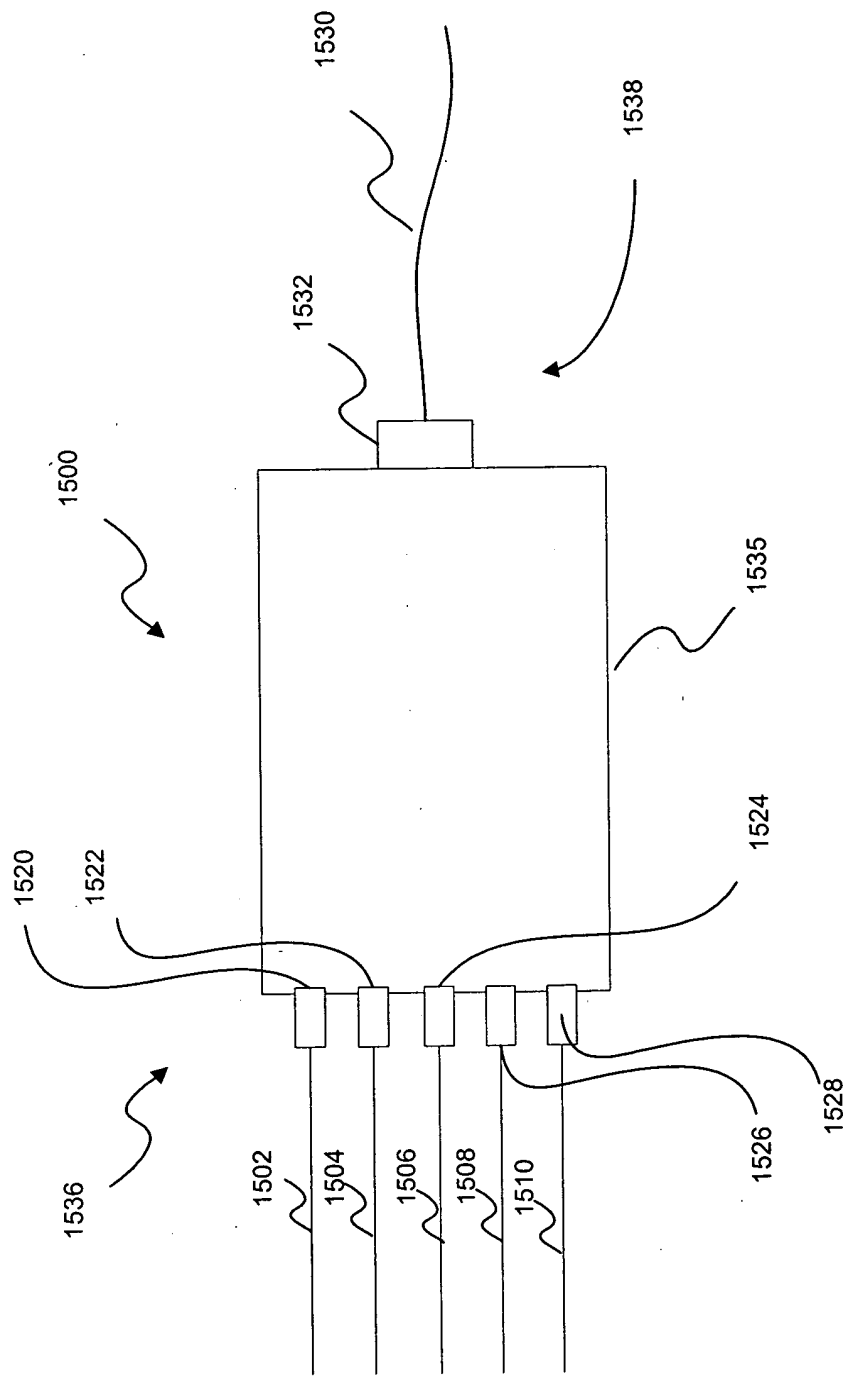



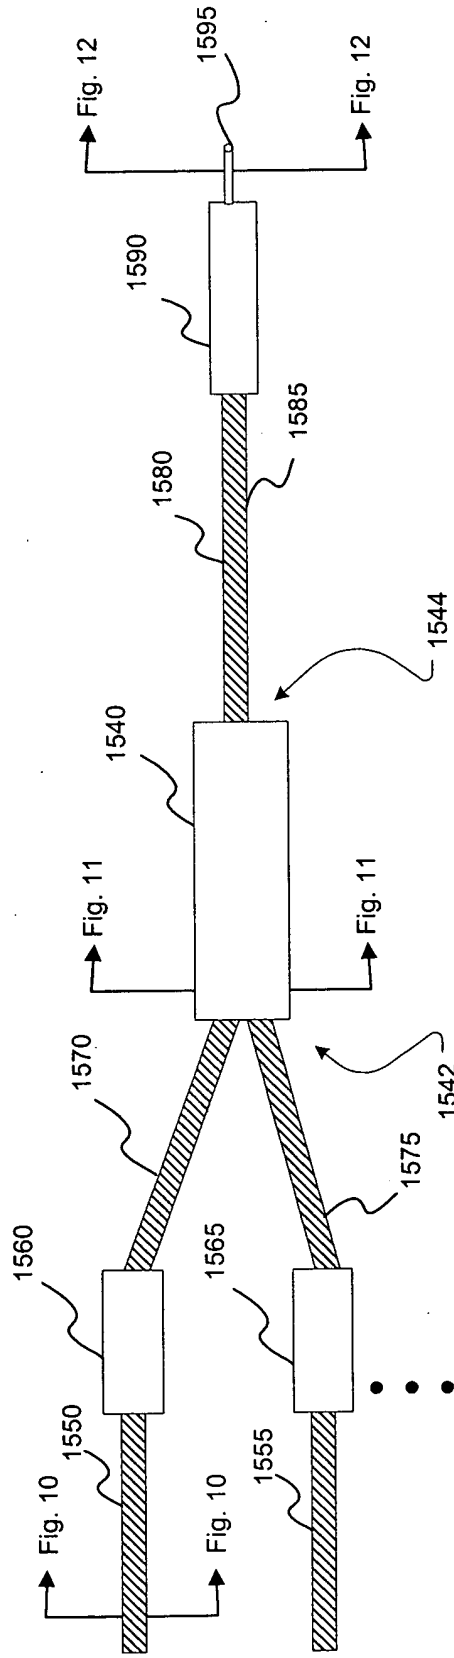

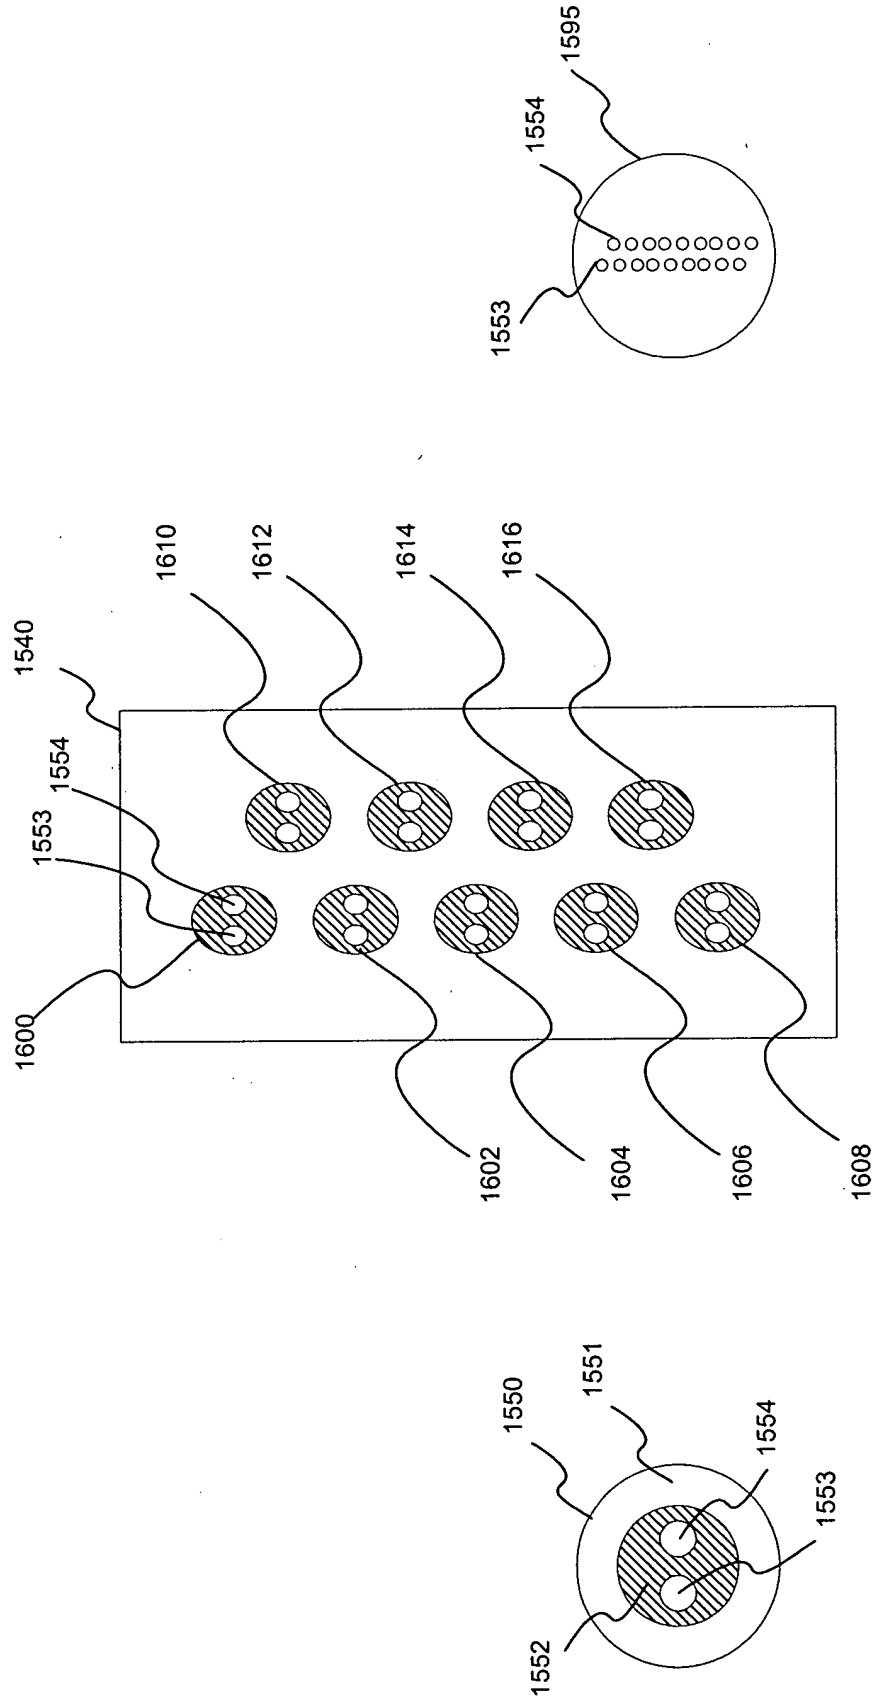


FIG. 10

FIG. 11

FIG. 12

FIGURE 13

1700




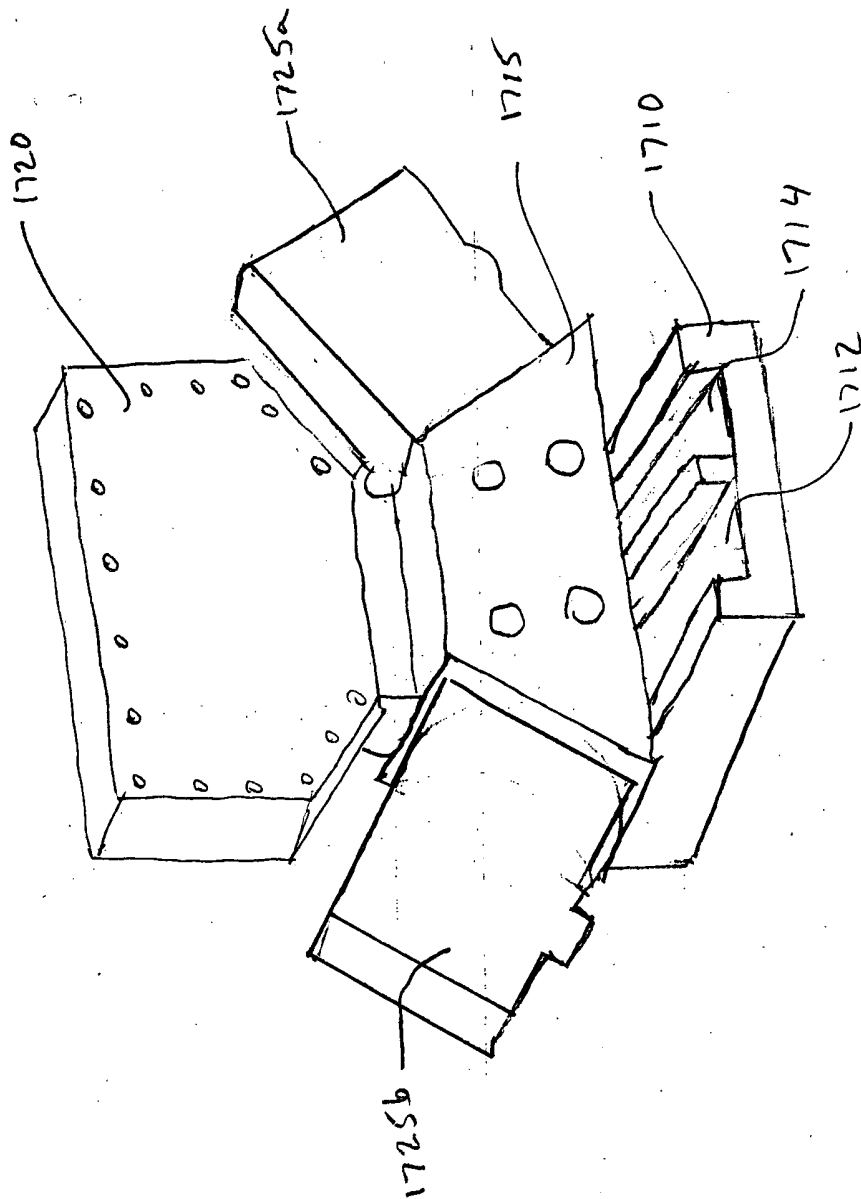


FIGURE 14


1700

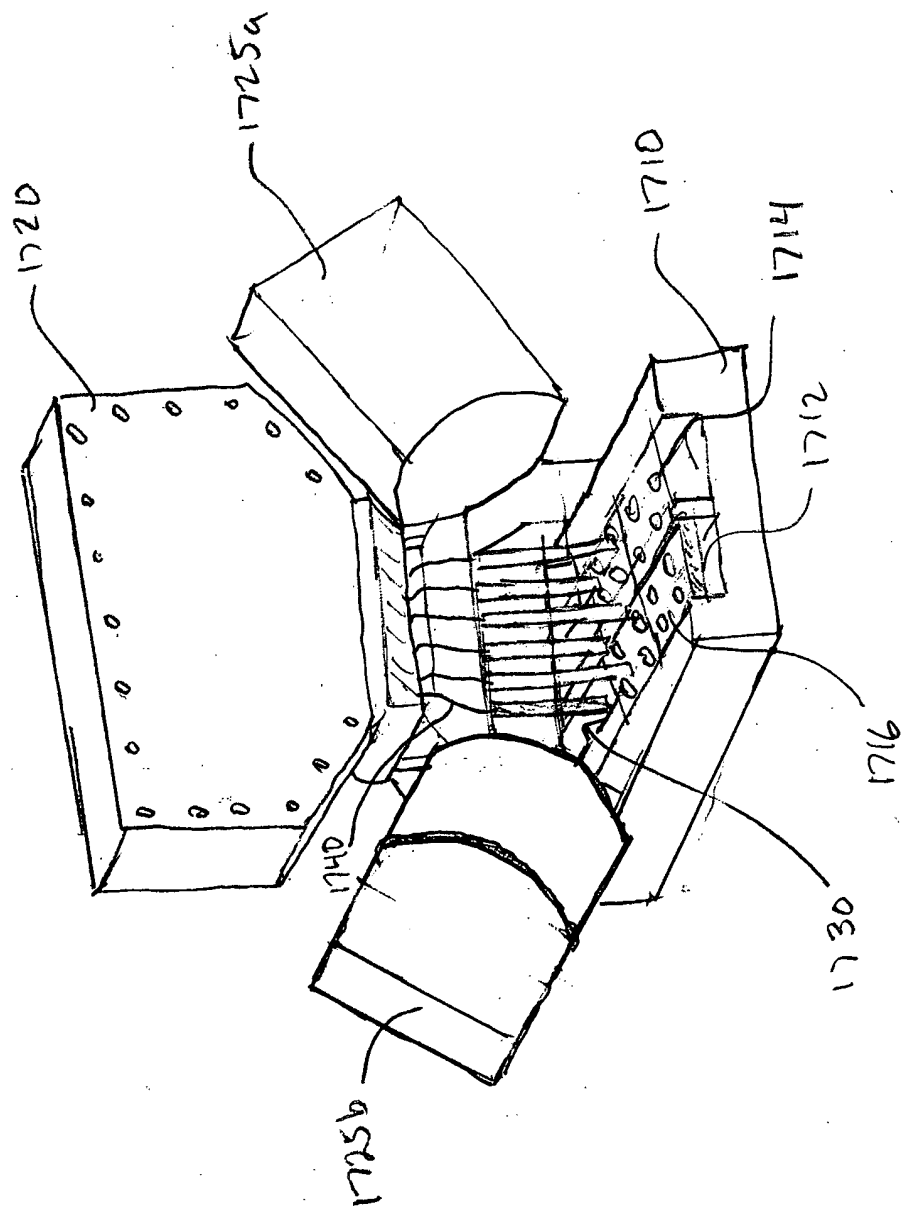

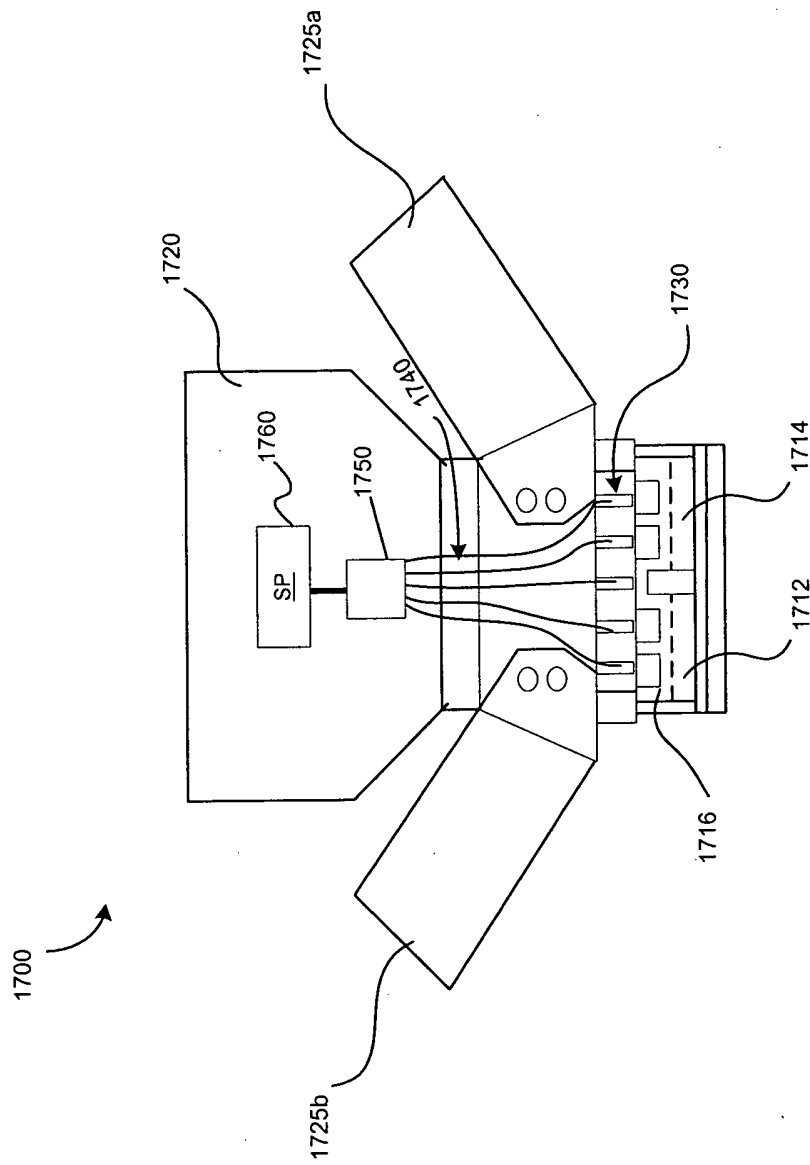


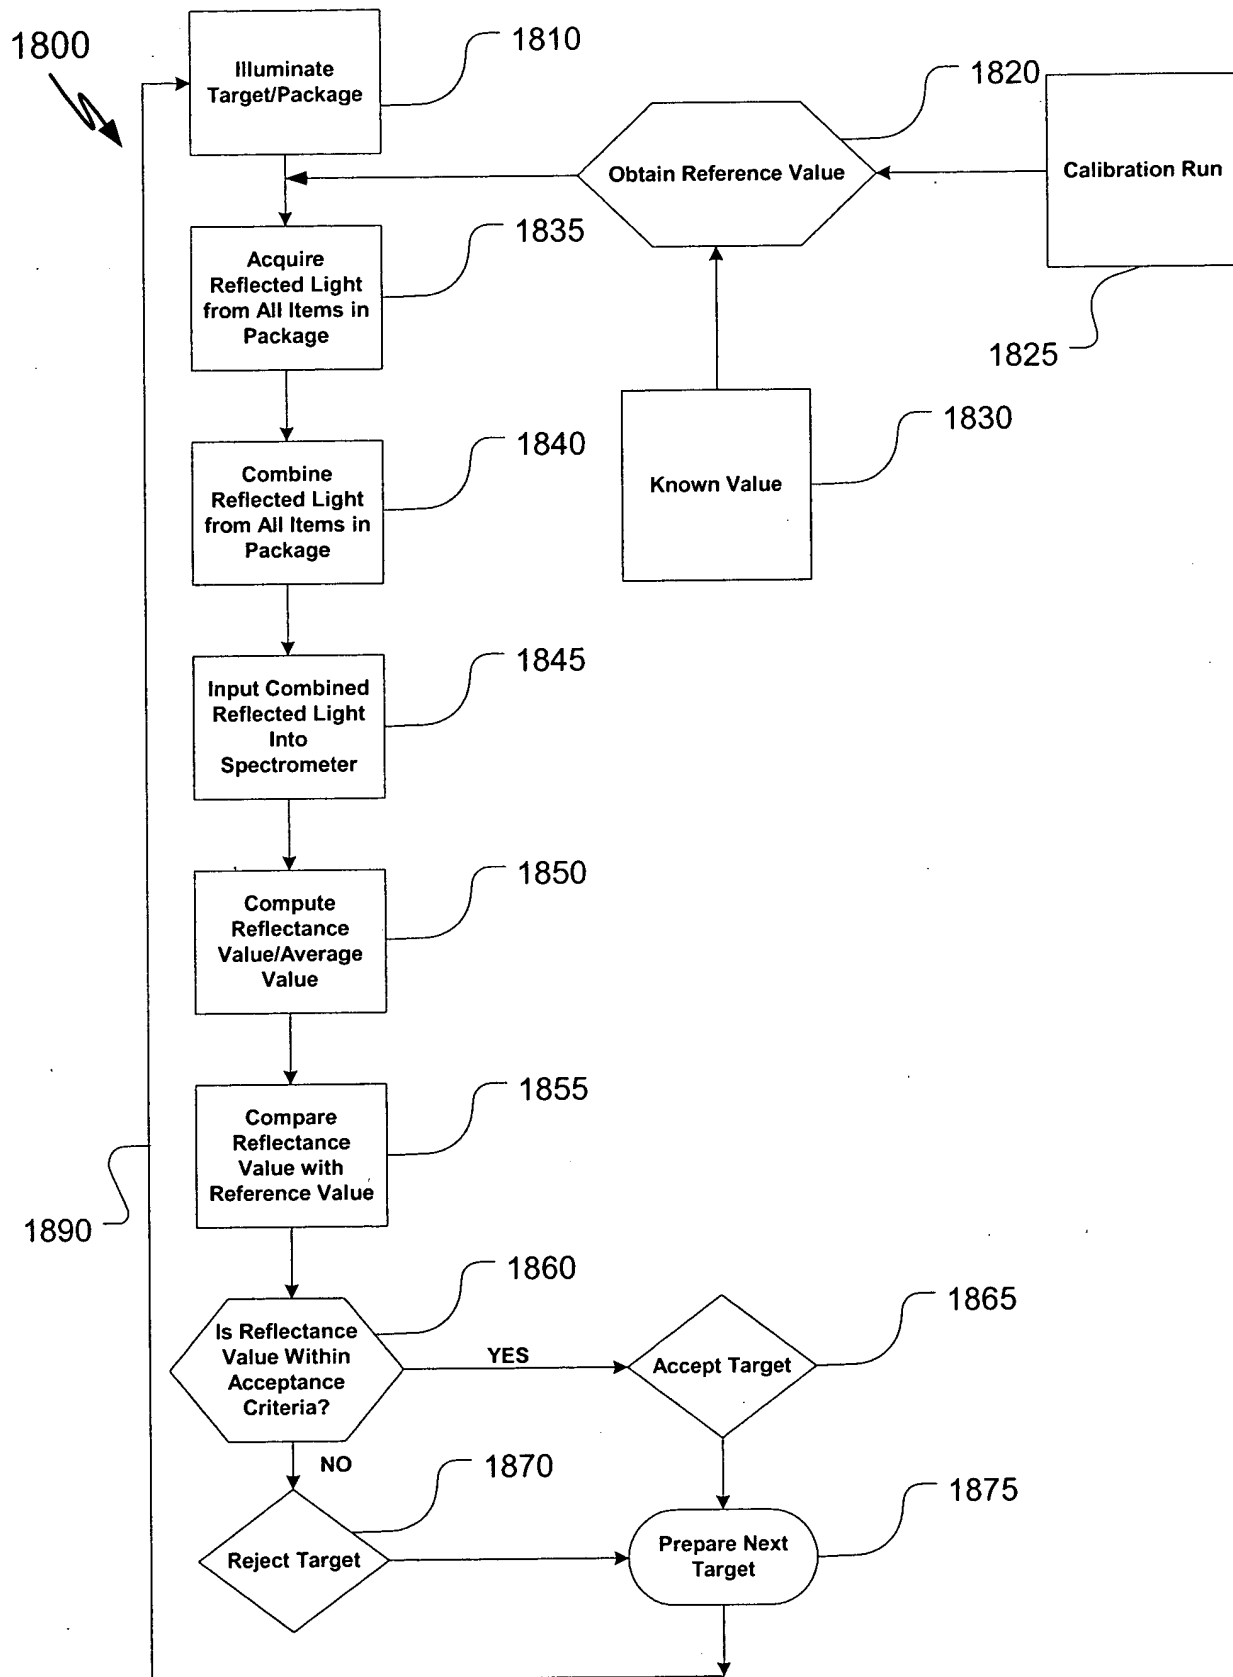

1900

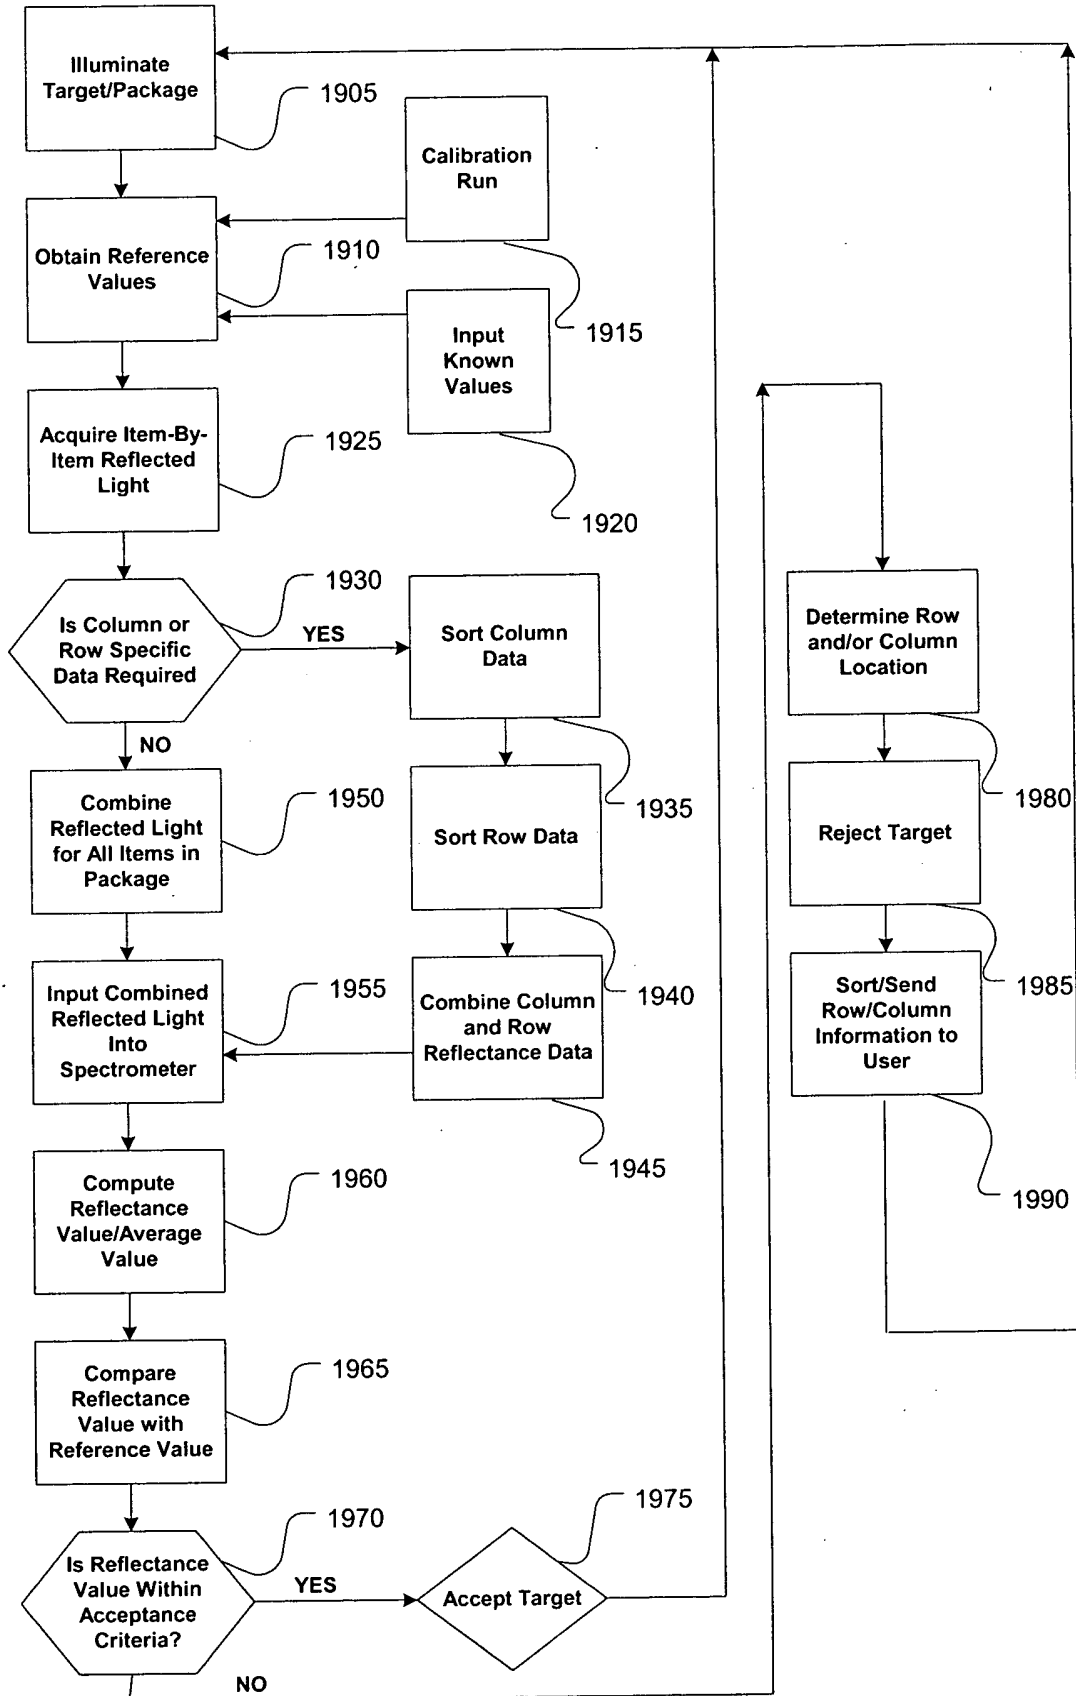

2000

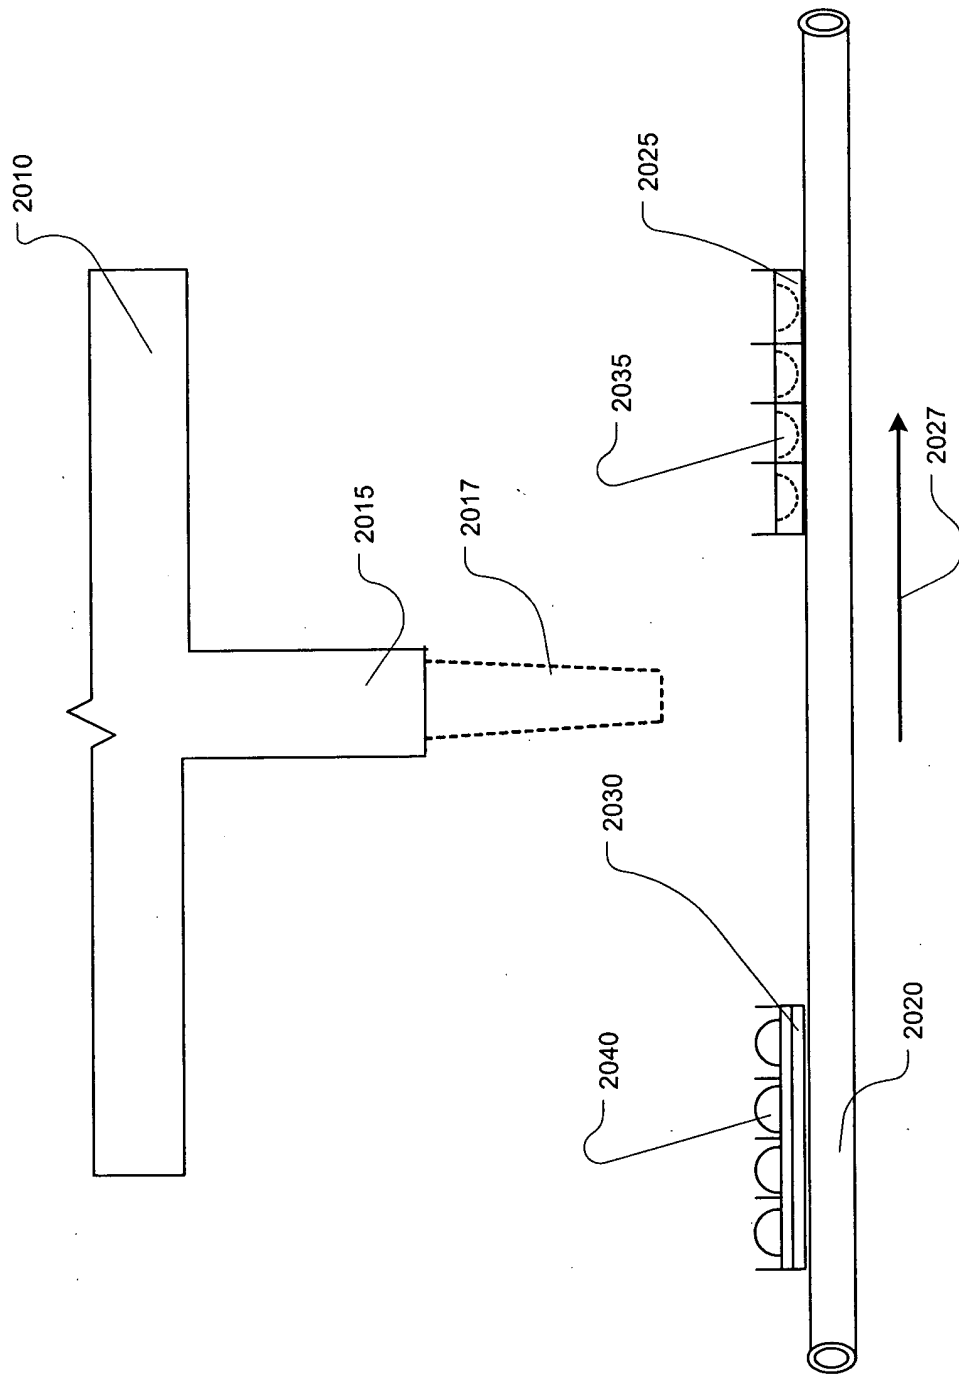



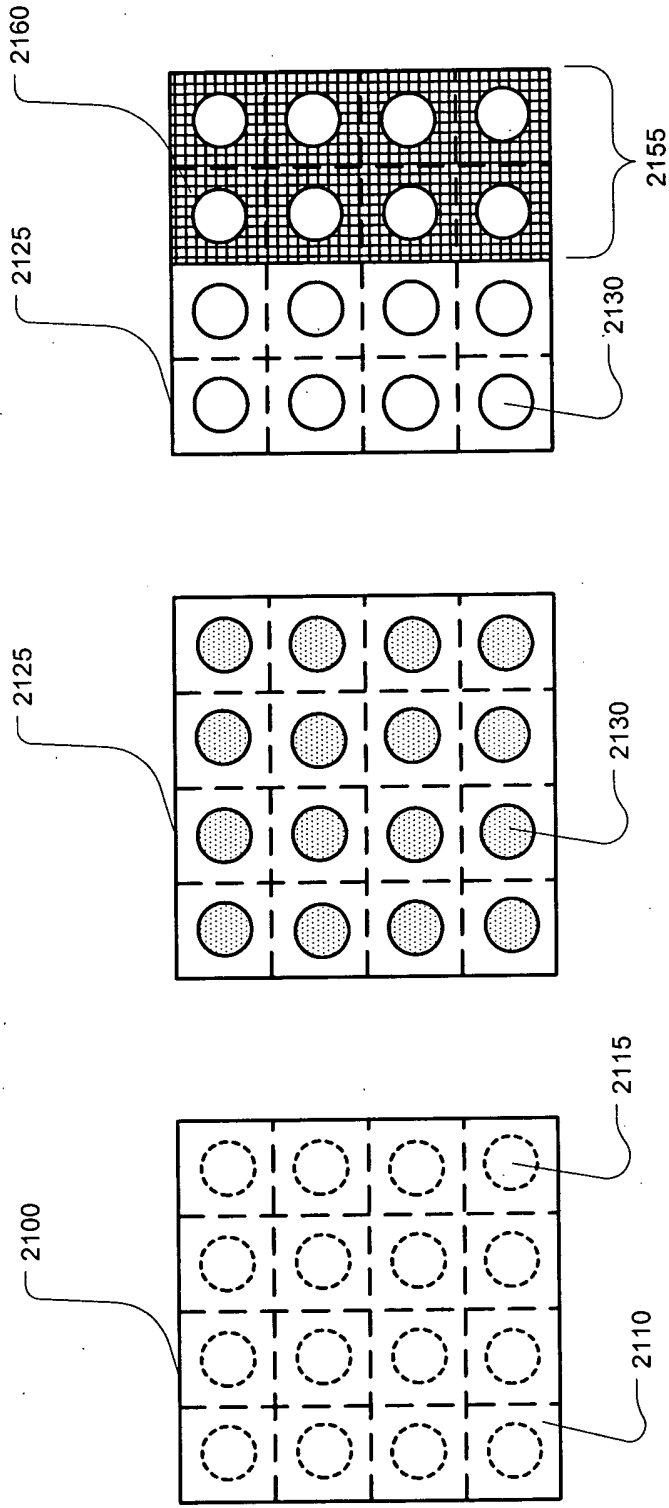


Figure 19C

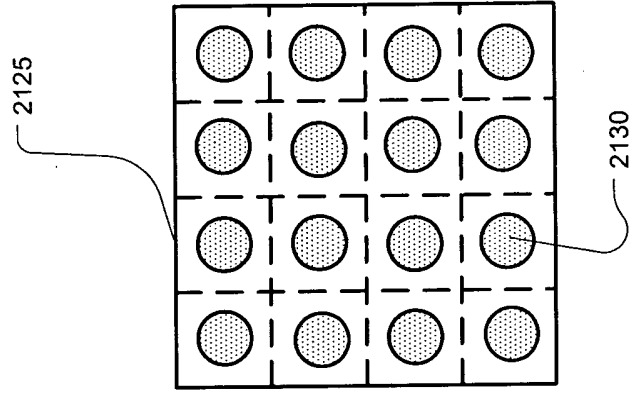


Figure 19B

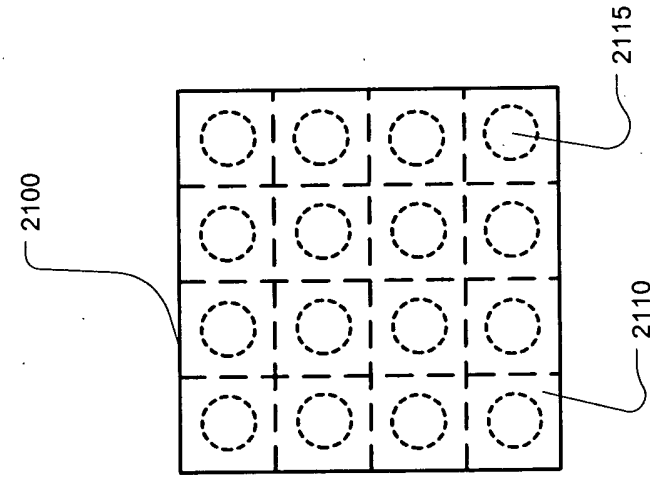


Figure 19A

